
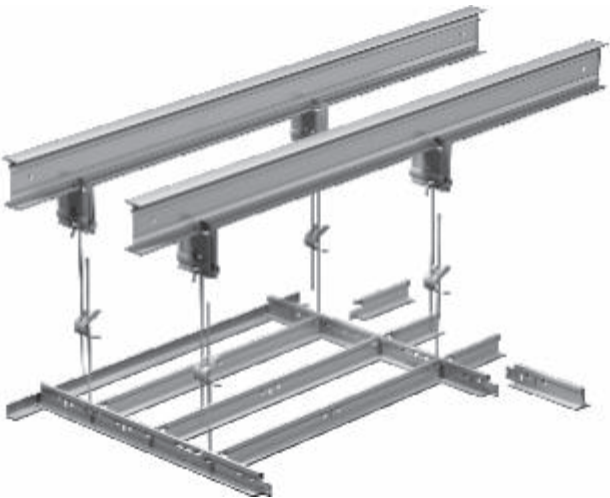


SYSTEM I


I-shaped 55, 70, 85 mm high and 40 mm wide concealed system for primary applications.
The profiles are appropriate for small until average spans with standard tile weights.

Long Span Systems



SPANLINE®

Profiles

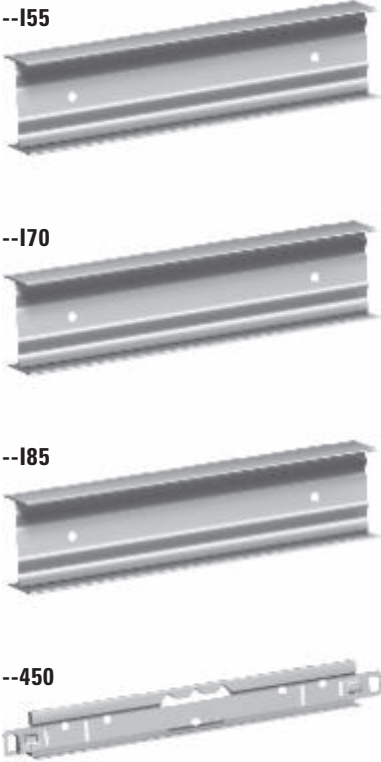


PRODUCT		DIMENSIONS		PER BUNDLE				PER PALLET		
reference	length	kg/pc	pcs.	m	kg	m³		cart.	m³	kg
I-runner										
--I55 -- 00	5000	4,61	5	25	23,04	0,04		40	1,44	922
--I70 -- 00	5000	4,99	5	25	24,94	0,04		40	1,8	997
--I85 -- 00	5000	5,37	4	20	21,47	0,04		40	1,8	859
Spacer bar										
--450 30 00	3600	1,26	25	90	31,47	0,03		50	1,53	1573
--450 31 00	3750	1,32	25	93,75	33,05	0,03		50	1,6	1652

Position of slots and suspension holes


--I55 --	No slots	5000.0			
--I70 --	No slots	5000.0			
--I85 --	No slots	5000.0			
--450 30	24 Slots	75	150	22 x 150	75
--450 31	24 Slots	78,125	156,25	22 x 156,25	78,125

Accessories

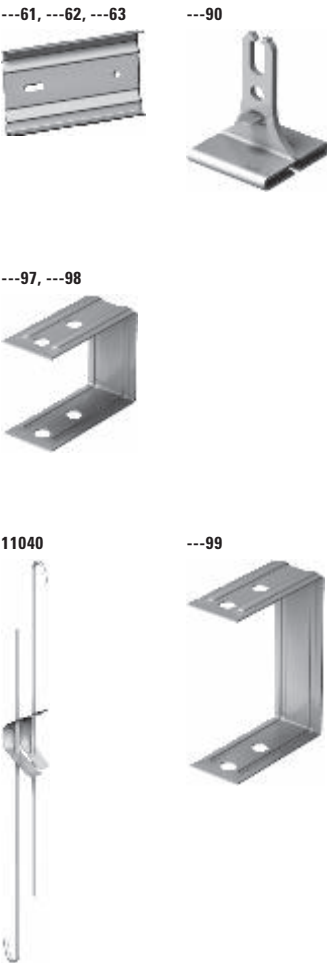

For the complete overview, please consult page 128 onwards.

Wall angles

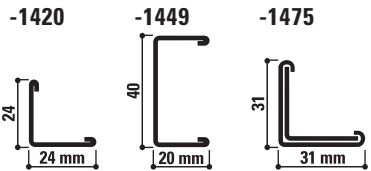

-1420 -- 001	3050	0,64	40	122	25,47	0,01	60	0,79	1528
-1449 -- 001	3050	1,02	32	97,6	32,51	0,04	30	1,32	975
-1475 -- 001	3050	1,74	20	61	34,7	0,01	45	0,59	1562

For the complete overview, please consult page 120 onwards.



Colours and range

The I-systems are supplied in fully galvanised finishing.
Special lengths are available upon request.




SYSTEM I

I-shaped 55, 70, 85 mm high and 40 mm wide concealed system for primary applications.
The profiles are appropriate for small until average spans with standard tile weights.

Long Span Systems

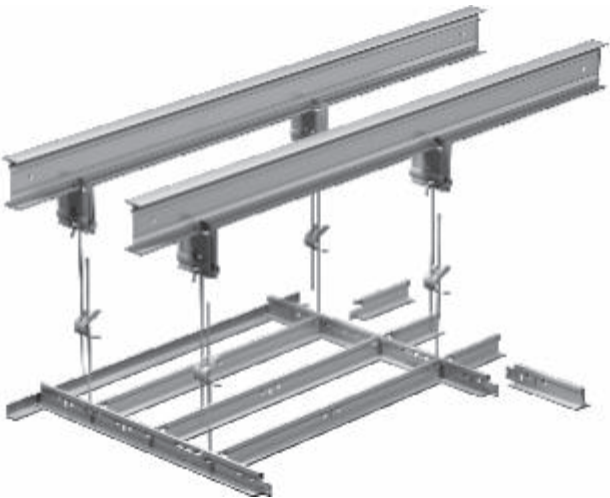

Profiles

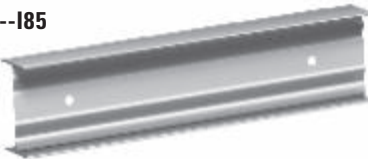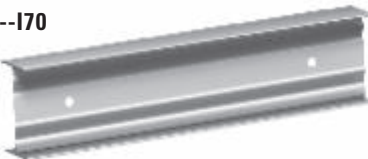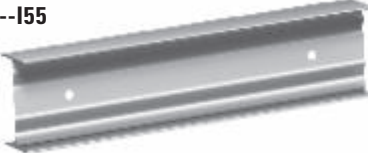

C - max. span (mm) - maximum deflection = L/300														
	axis/axis distance A	max. distance between suspension points (C) in mm												
		kg/m² of ceiling												
		3	4	5	6	7	8	9	10	12	14	16	20	30

--170	600	5000	5000	5000	5000	5000	5000	4950	4750	4500	4250	4050	3750	3300
	700	5000	5000	5000	5000	5000	4850	4700	4500	4250	4050	3850	3600	3150
	800	5000	5000	5000	5000	4850	4650	4500	4300	4050	3850	3700	3450	3000
	900	5000	5000	5000	4950	4700	4500	4300	4150	3900	3700	3550	3300	2850
	1000	5000	5000	5000	4750	4500	4300	4150	4000	3750	3600	3450	3200	2750
	1100	5000	5000	4900	4600	4400	4200	4000	3900	3650	3450	3300	3100	2700
	1200	5000	5000	4750	4500	4250	4050	3900	3750	3550	3350	3200	3000	2600
	1300	5000	5000	4650	4350	4150	3950	3800	3650	3450	3300	3150	2900	2550
	1400	5000	4850	4500	4250	4050	3850	3700	3600	3350	3200	3050	2850	2500
	1500	5000	4750	4400	4150	3950	3750	3650	3500	3300	3150	3000	2750	2400
	2000	4750	4300	4000	3750	3600	3450	3300	3203	3014	2863	2738	2542	2221


C - max. span (mm) - maximum deflection = L/300														
	axis/axis distance A	max. distance between suspension points (C) in mm												
		kg/m² of ceiling												
		3	4	5	6	7	8	9	10	12	14	16	20	30

--155	600	5000	5000	5000	4750	4500	4300	4150	4000	3750	3550	3400	3150	2750
	700	5000	5000	4800	4500	4250	4100	3900	3800	3550	3400	3250	3000	2600
	800	5000	4900	4550	4300	4100	3900	3750	3600	3400	3250	3100	2850	2500
	900	5000	4750	4400	4150	3900	3750	3600	3500	3250	3100	2950	2750	2400
	1000	5000	4550	4250	4000	3800	3600	3500	3350	3150	3000	2850	2650	2300
	1100	4850	4400	4100	3850	3650	3500	3350	3250	3050	2900	2800	2600	2250
	1200	4750	4300	4000	3750	3550	3400	3250	3150	2950	2800	2700	2500	2200
	1300	4600	4200	3900	3650	3450	3300	3200	3050	2900	2750	2650	2450	2100
	1400	4500	4100	3800	3550	3400	3250	3100	3000	2800	2700	2550	2400	2050
	1500	4400	4000	3700	3500	3300	3150	3050	2950	2750	2600	2500	2300	2000
	2000	4000	3600	3350	3150	3000	2850	2750	2650	2500	2400	2250	2100	1850

C - max. span (mm) - maximum deflection = L/300														
	axis/axis distance A	max. distance between suspension points (C) in mm												
		kg/m² of ceiling												
		4	5	6	7	8	9	10	12	14	16	20	30	40

--185	600	5000	5000	5000	5000	5000	5000	5000	5000	5000	4900	4700	4350	3800	3450
	700	5000	5000	5000	5000	5000	5000	5000	5000	4900	4650	4450	4150	3600	3300
	800	5000	5000	5000	5000	5000	5000	5000	5000	4700	4450	4250	3950	3450	3150
	900	5000	5000	5000	5000	5000	5000	5000	4800	4500	4300	4100	3800	3350	3000
	1000	5000	5000	5000	5000	5000	4800	4650	4350	4150	3950	3700	3200	2900	
	1100	5000	5000	5000	5000	4850	4650	4500	4250	4000	3850	3550	3100	2800	
	1200	5000	5000	5000	4900	4700	4500	4350	4100	3900	3750	3450	3000	2750	
	1300	5000	5000	5000	4800	4600	4400	4250	4000	3800	3650	3350	2950	2650	
	1400	5000	5000	4900	4650	4450	4300	4150	3900	3700	3550	3300	2850	2600	
	1500	5000	5000	4800	4550	4350	4200	4050	3800	3600	3450	3200	2800	2550	
	2000	5000	4650	4350	4150	3950	3800	3700	3450	3300	3150	2900	2550	2300	

Accessories



---97, ---98



11040




---99




For the complete overview, please consult page 128 onwards.

Wall angles

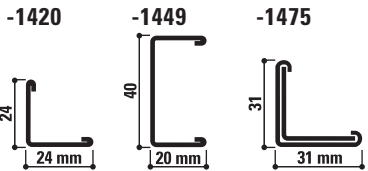

-1420 -- 001	3050	0,64	40	122	25,47	0,01	60	0,79	1528
-1449 -- 001	3050	1,02	32	97,6	32,51	0,04	30	1,32	975
-1475 -- 001	3050	1,74	20	61	34,7	0,01	45	0,59	1562

For the complete overview, please consult page 120 onwards.

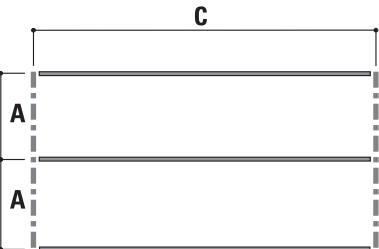

Colours and range

The I-systems are supplied in fully galvanised finishing. Special lengths are available upon request.